

Vertex S

BACKSHEET MONOCRYSTALLINE MODULE

PRODUCT: TSM-XXXDE09R.05

PRODUCT RANGE: 405-425W

425W

MAXIMUM POWER OUTPUT

0~+5W

BINNING TOLERANCE

21.3%


MAXIMUM EFFICIENCY

25 Years **PRODUCT WARRANTY**

25 Years **POWER WARRANTY**



reddot winner 2022

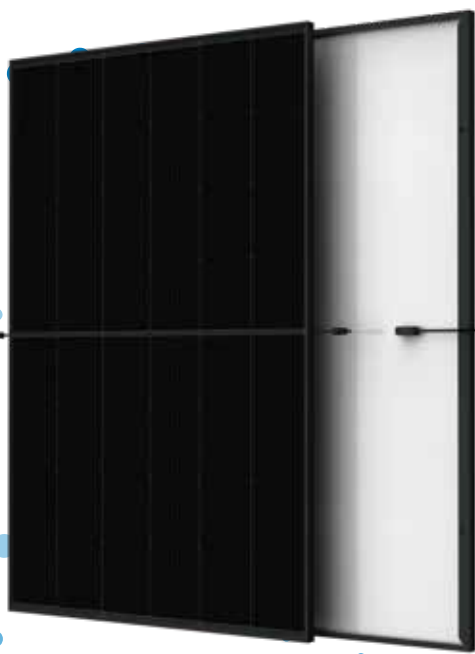

Outstanding Visual Appearance

- Designed with aesthetics in mind
- Excellent cell color control by dedicated cell blackening treatment and machine selection.
- Thinner wires that appear all black at a distance



Small in size, big on power

- Small form factor. Generate a huge amount of energy even in limited space.
- Up to 425W, 21.3% module efficiency with high density interconnect technology
- Multi-busbar technology for better light trapping effect, lower series resistance and improved current collection
- Reduce installation cost with higher power bin and efficiency
- Boost performance in warm weather lower temperature coefficient (-0.34%) and operating temperature



Universal solution for residential and C&I rooftops


- Designed for compatibility with existing mainstream optimizers, inverters and mounting systems
- Perfect size and low weight. Easy for handling. Economy for transporting
- Diverse installation solutions. Flexible for system deployment



High Reliability

- 25 year product warranty
- 25 year performance warranty with lowest degradation;
- Minimized micro-cracks with innovative non-destructive cutting technology
- Mechanical performance up to 6000 Pa positive load and 4000 Pa negative load and fire class rating C

Trina Solar's Backsheet Performance Warranty

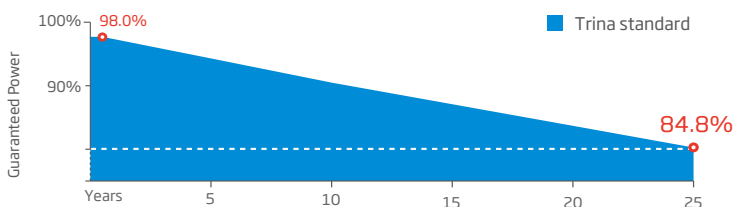


Comprehensive Products and System Certificates




IEC61215/IEC61730/IEC61701/IEC62716
 ISO 9001: Quality Management System
 ISO 14001: Environmental Management System
 ISO14064: Greenhouse Gases Emissions Verification
 ISO45001: Occupational Health and Safety Management System




DIMENSIONS OF PV MODULE(mm)

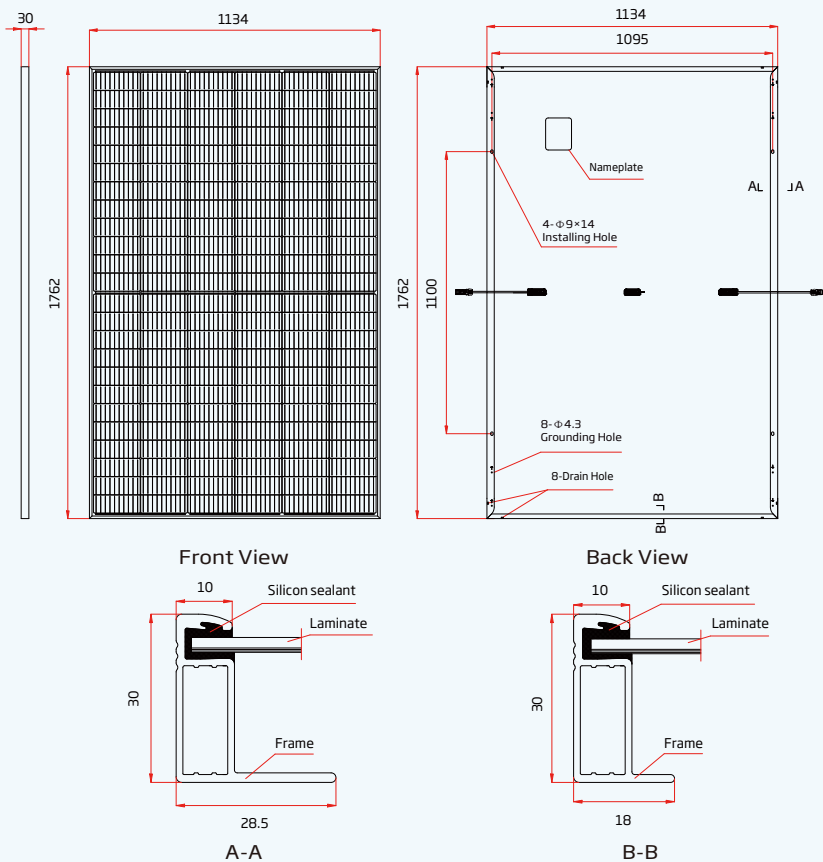

I-V CURVES OF PV MODULE(415 W)

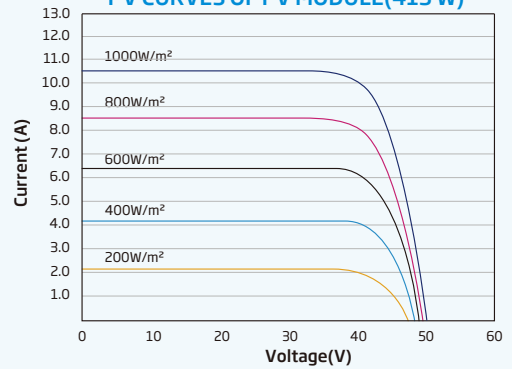

P-V CURVES OF PV MODULE(415W)

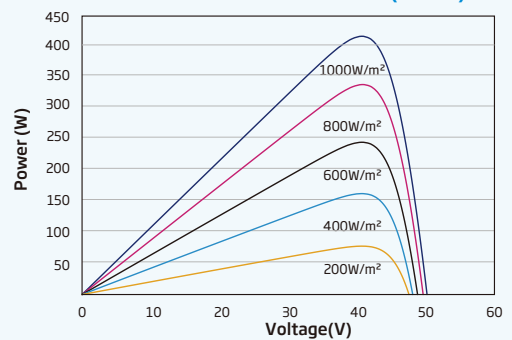

ELECTRICAL DATA (STC) TSM-XXXDE09R.05(XXX=405-425)

Parameter	405	410	415	420	425
Peak Power Watts-P _{MAX} (Wp)*	405	410	415	420	425
Binning Tolerance-P _{MAX} (W)	0 ~ +5				
Maximum Power Voltage-V _{MPP} (V)	41.3	41.5	41.7	42.0	42.2
Maximum Power Current-I _{MPP} (A)	9.82	9.87	9.94	10.01	10.08
Open Circuit Voltage-V _{OC} (V)	49.7	49.8	50.0	50.1	50.2
Short Circuit Current-I _{SC} (A)	10.50	10.53	10.55	10.58	10.61
Module Efficiency η _m (%)	20.3	20.5	20.8	21.0	21.3

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. *Measuring tolerance: ±3%.

ELECTRICAL DATA (NOCT)

Parameter	306	309	312	317	321
Maximum Power-P _{MAX} (Wp)	306	309	312	317	321
Maximum Power Voltage-V _{MPP} (V)	38.3	38.5	38.7	39.2	39.5
Maximum Power Current-I _{MPP} (A)	7.99	8.03	8.07	8.10	8.13
Open Circuit Voltage-V _{OC} (V)	46.8	46.9	47.1	47.1	47.2
Short Circuit Current-I _{SC} (A)	8.46	8.49	8.50	8.53	8.55

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline
No. of cells	144 cells
Module Dimensions	1762×1134×30 mm (69.37×44.65×1.18 inches)
Weight	21.6 kg (47.6 lb)
Glass	3.2 mm (0.13 inches), High Transmission, Tempered Glass
Encapsulant material	EVA/POE
Backsheet	Black-White
Frame	30mm(1.18 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²) Length: 1100mm/1100mm(43.3/43.3 inches)
Connector	Stabuli MC4 EVO2 / Trina Solar TS4 Plus / Trina Solar TS4

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P _{MAX}	-0.34%/°C
Temperature Coefficient of V _{OC}	-0.25%/°C
Temperature Coefficient of I _{SC}	0.04%/°C

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating*	20A / 25A

*Default 20A / 25A upon special request

WARRANTY

25 year Product Workmanship Warranty**
 25 year Power Warranty
 2% first year degradation
 0.55% Annual Power Attenuation

PACKAGING CONFIGURATION

Modules per box: 36 pieces
 Modules per 40' container: 936 pieces

(**Please refer to Limited Warranty Supplement that applies to the TSM-***DE09R.05, TSM-***DE09R.0B. Products supplied after 1st Aug 2022 and installed within Australia & New Zealand residential rooftop market.)